

# Specification Sheet

SH-6001

High-Performance Plastic Optical Fiber

E s k a™

**MITSUBISHI RAYON CO.,LTD.**

**ESKA OPTICAL FIBER DIVISION**

6-41 Konan 1-Chome,Minato-ku,Tokyo,JAPAN

Phone :+81-3-5495-3060

Facsimile:+81-3-5495-3212


1. Scope  
This specification covers basic requirements for the structure and optical performances of SH-6001 .
2. Structure

Table 1

<b>SH-6001</b>
----------------

Item		Specification			
		Unit	Min.	Typ.	Max.
Optical Fiber	Core Material	-	Polymethyl-Methacrylate Resin		
	Cladding Material	-	Fluorinated Polymer		
	Core Refractive Index	-	1.49		
	Refractive Index Profile	-	Step Index		
	Numerical Aperture	-	0.5		
	Core Diameter	μm	1,380	1,470	1,560
	Cladding Diameter	μm	1,410	1,500	1,590
Jacket	Material	-	Polyethylene		
	Color	-	Black		
	Diameter	mm	2.85	3.00	3.15
Approximate Weight		g/m	7		
Indication on the Jacket		-	·····SUPER ESKA·····:Blue		

Sectional View

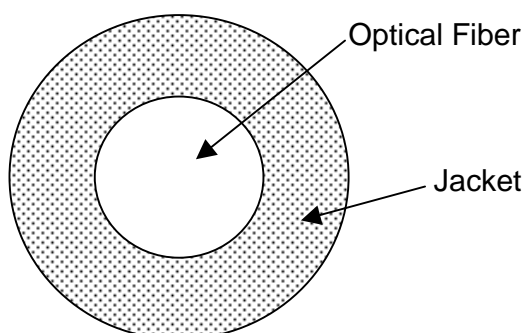

## 3. Performances

Table 2

SH-6001

Item		Acceptance Criterion and/or [ Test Condition ]	Specification			
			Unit	Min.	Typ.	Max.
Maximum Rating	Storage Temperature	No Physical Deterioration [ in a Dry Atmosphere ]		-55	-	+70
	Operation Temperature	No Deterioration in Optical Properties* [ in a Dry Atmosphere ]		-55	-	+70
		No Deterioration in Optical Properties** [ under 95%RH condition ]		-	-	+60
Optical Properties	Transmission Loss [ 650nm Collimated Light ]	[ 25 50%RH ]	dB/km	-	-	200
		[ Operation Temperature ]	dB/km	-	-	220
Mechanical Characteristics	Minimum Bend Radius	Loss Increment 0.5dB [ A Quarter Bend ]	mm	40	-	-
	Repeated Bending Endurance	Loss Increment 1dB [ in Conformity to the JIS C 6861 ]***	Times	1,000	-	-
	Tensile Strength	Tensile Force at 5% Elongation [ in Conformity to the JIS C 6861 ]	N	160	-	-
	Twisting Endurance	Loss Increment 1dB [ Sample Length : 1m Tensile Force : 4.9N ]	Times	2	-	-
	Impact Endurance	Loss Increment 1dB [ in Conformity to the JIS C 6861 ]	N·m	0.4	-	-

All tests are carried out under temperature of 25 unless otherwise specified.

\* Attenuation change shall be within +/- 10% after 1,000 hours.

\*\* Attenuation change shall be within +/- 10% after 1,000 hours, except that due to absorbed water.

\*\*\* Bend Angle +/-90°, Bend Radius 35mm, Tension 500g