

Specification Sheet

SK-20

High-Performance Plastic Optical Fiber

E s k a™

mitsubishi RAYON CO.,LTD.

ESKA OPTICAL FIBER DIVISION

6-41 Konan 1-Chome,Minato-ku,Tokyo,JAPAN

Phone : +81-3-5495-3060

Facsimile : +81-3-5495-3212

1. Scope


The specification covers basic requirements for the structure and optical performances of SK-20.

2. Structure

Table 1

Item		SK-20			
		Specification			
		Unit	Min.	Typ.	Max.
Optical Fiber 1	Core Material	-	Polymethyl-Methacrylate Resin		
	Cladding Material	-	Fluorinated Polymer		
	Core Refractive Index	-	1.49		
	Refractive Index Profile	-	Step Index		
	Numerical Aperture	-	0.5		
	Core Diameter	μm	455	485	515
	Cladding Diameter	μm	470	500	530
Approximate Weight		g/m	0.2		

Sectional View

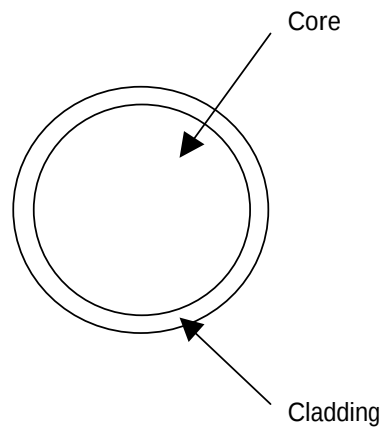

3. Performances

Table 2

SK-20

Item		Acceptance Criterion and/or [Test Condition]	Specification			
			Unit	Min.	Typ.	Max.
Maximum Rating	Storage Temperature	No Physical Deterioration [in a Dry Atmosphere]		- 55	-	+ 70
	Operation Temperature	No Deterioration in Optical Properties * [in a Dry Atmosphere]		- 55	-	+ 70
		No Deterioration in Optical Properties ** [under 95%RH condition]		-	-	+ 60
Optical Properties	Transmission Loss	[650nm Collimated Light] [Standard condition] [10m-1m cutback]	dB/km	-	-	180
Mechanical Characteristics	Minimum Bend Radius	Loss Increment 0.5dB [A Quarter Bend]	mm	10	-	-
	Tensile Strength	Tensile Force at 5% Elongation; in Conformity to the JIS C 6861]	N	14	-	-

All tests are carried out under temperature of 25 unless otherwise specified.

* Attenuation change shall be within +/- 10% after 1,000 hours.

** Attenuation change shall be within +/- 10% after 1,000 hours, except that due to absorbed water.